




LUMBER WORLD

'A Destination for your Imagination'

GI TRACK

Completing the ensemble, GI Tracks elegantly serve as hat channels in drywall applications. Framing walls, supporting ceilings, constructing partitions – they excel in their multifaceted roles. Carbon steel mastery, with thickness options up to 3 mm and lengths up to 12 m, underscores their reliability. Paired with JSW Galvanized Plain Sheets, they become the backbone of durability and precision in construction.

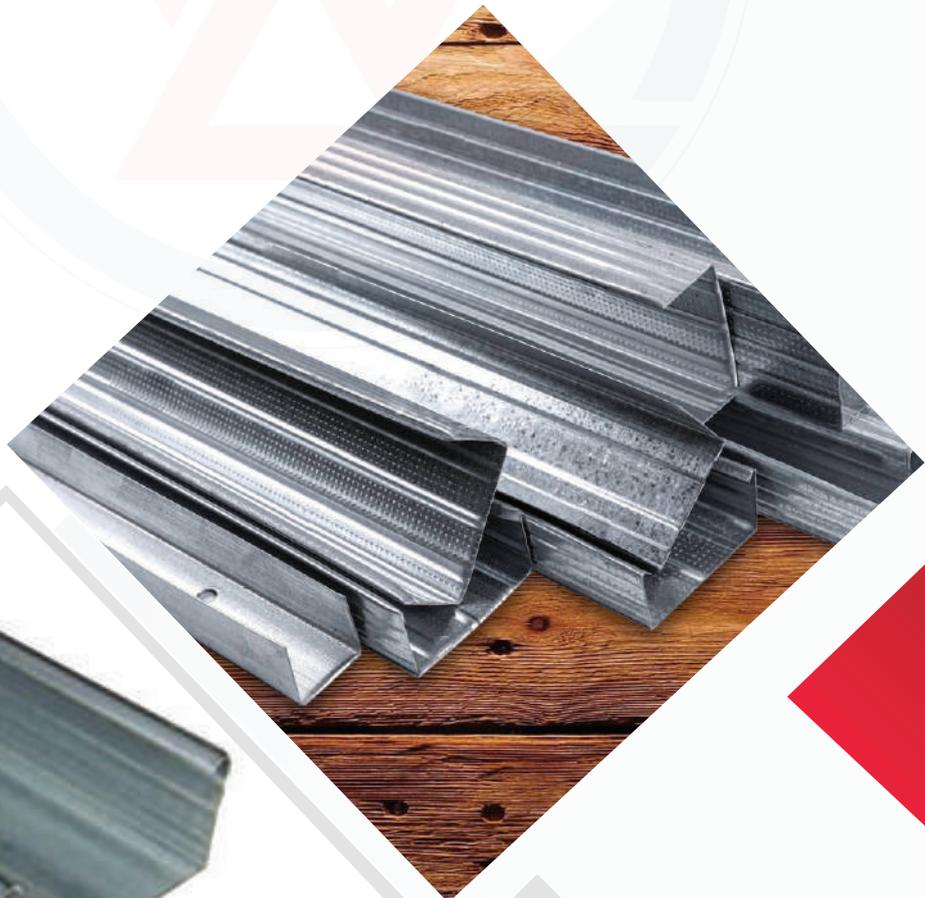



GI TRACK

SPECIFICATIONS

Identification	<p>The track channel are cold roll formed Profiles using corrosion Resistant hot-dipped Galvanised steel coils Conforming to astm a-653</p> 
Specification	<p>Widths in mm: 52 mm,72 mm Height in mm: 25 mm Thickness :0.35, 0.05 mm Length : from 3000 mm to 4000 mm</p>
Raw material Properties	<p>Steel grade: g300 Min. Yield strength :300 mpa Min. Tensile strength :340 mpa Coating:hdg</p>
Standards	<p>These profiles comply with: astm a-653 And astm c645 and astm a924/a924m for steel coils And equivalent international standards</p>
Applications	<p>These tracks are placed horizontally on the floor to put Vertical studs for a drywall structure, designed for quick screw attachment of facing materials. It's strong non load bearing components for interior parti-tions and column fire proofing</p>